




**ÖZEL  
CLIP-IN  
SİSTEM**

# ÖZEL CLIP-IN SİSTEM

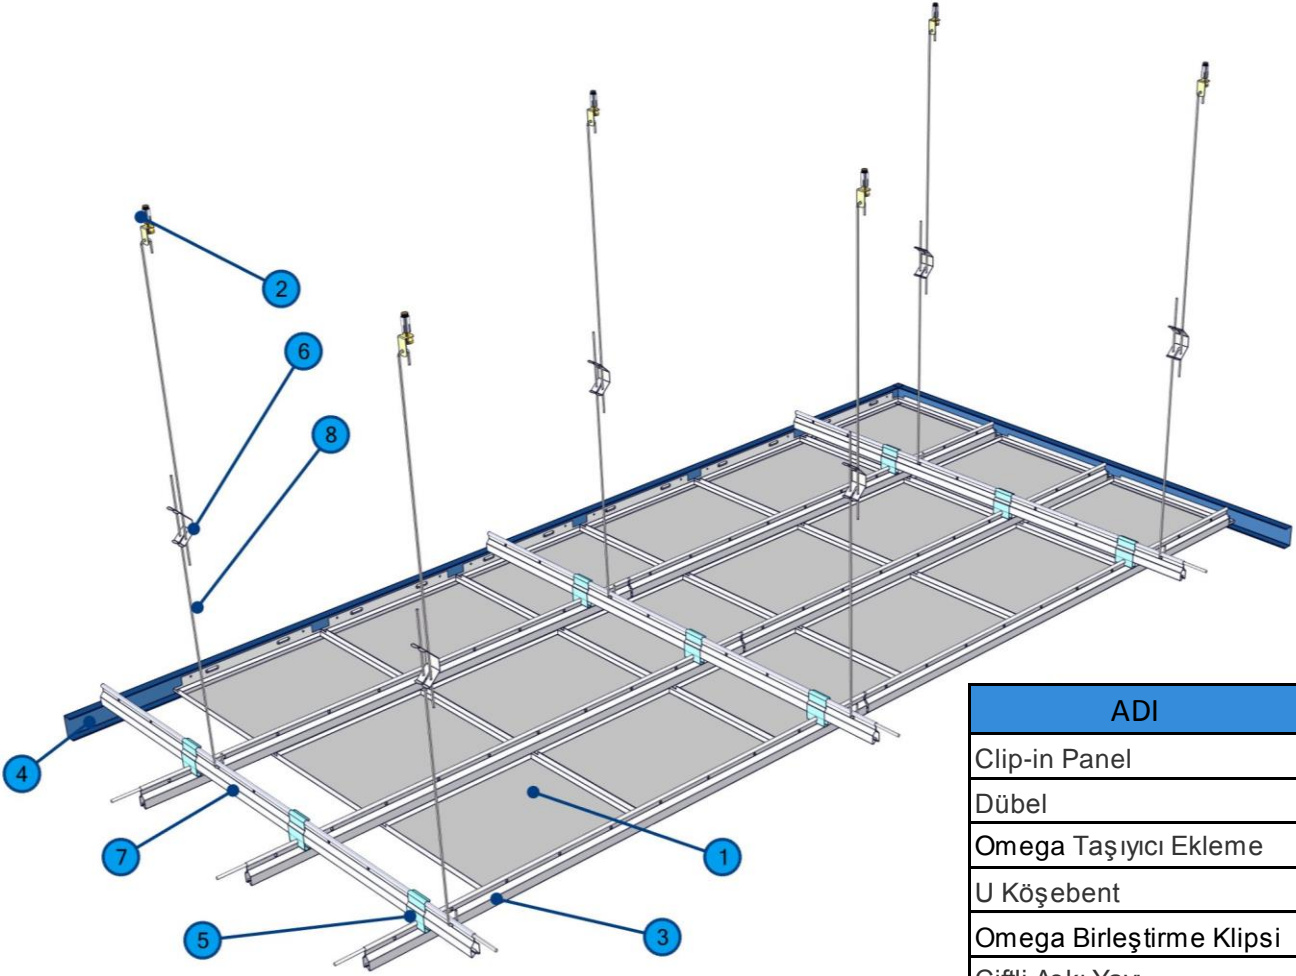



ADI	KOD
Clip-in Panel	1
Dübel	2
Omega Taşıyıcı Ekleme	3
U Köşebent	4
Omega Birleştirme Klipsi	5
Çiftli Askı Yayı	6
Omega Taşıyıcı	7
Askı Teli	8

- Özel boyutlarda, standart Clip-in sisteminin tüm avantajlarından yararlanarak benzersiz projeler tasarlanmasını sağlar.
- Heavy Duty Clip-in profili, özel boyutlu paneller nedeniyle taşıyıcı sisteme fazla yük bindiğinde kullanılır.

## Ebat

En ..... Min : 100 mm    Max : 1200 mm

Uzunluk ..... Min : 100 mm    Max : 4000 mm

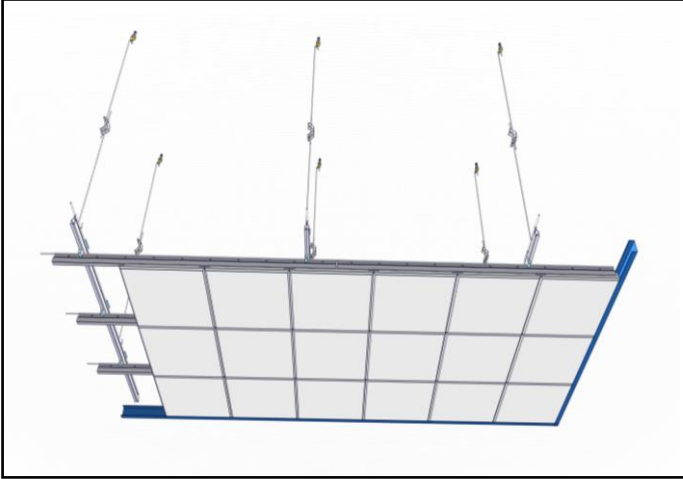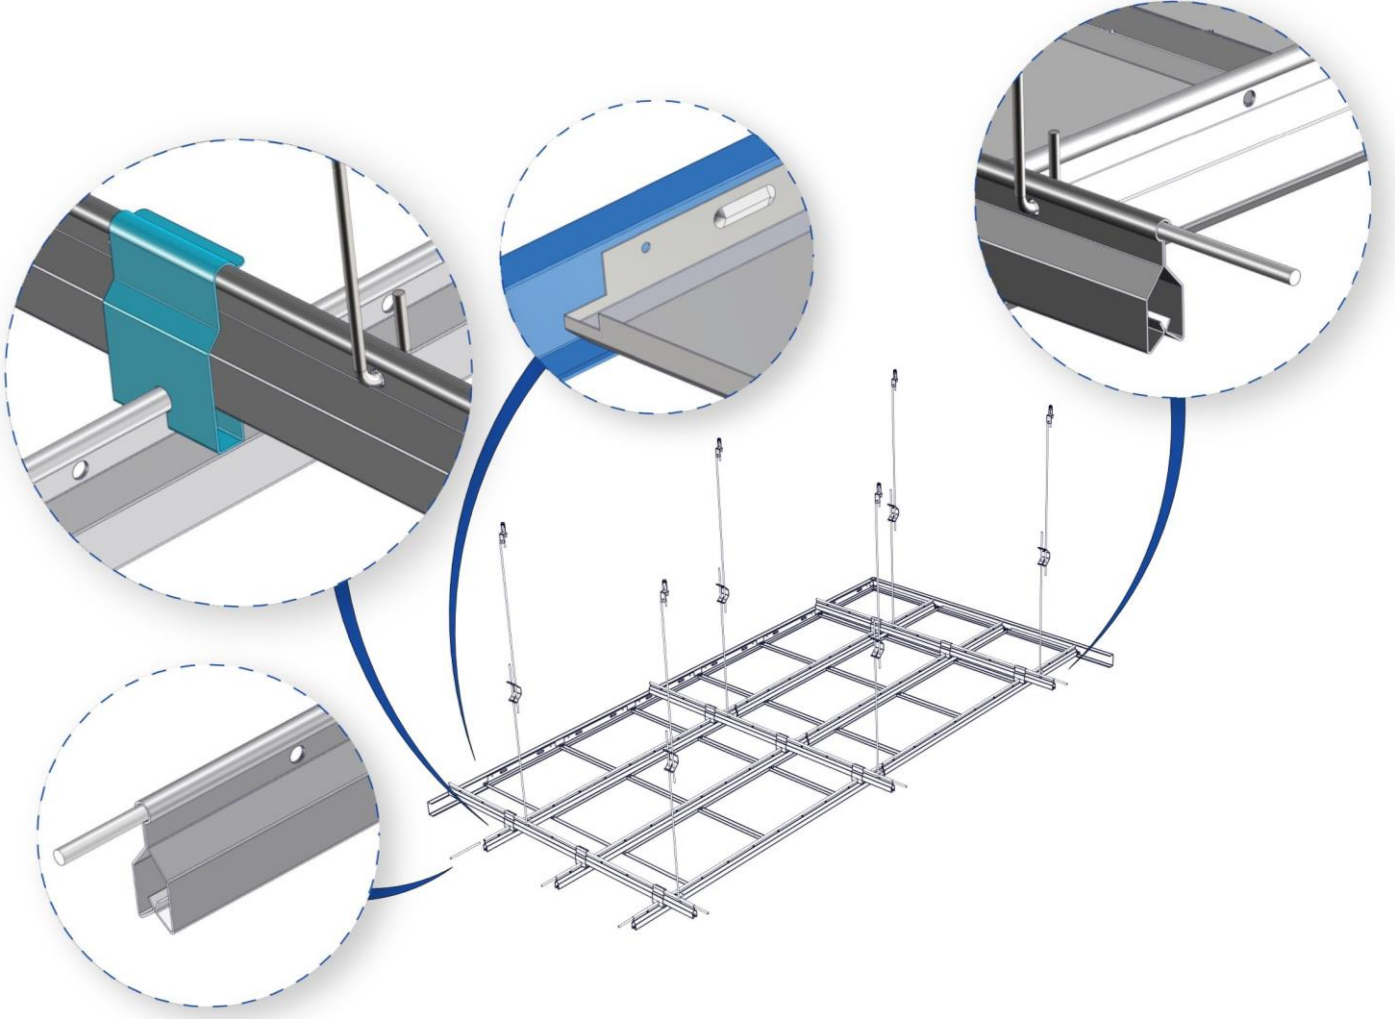

## PANEL MALZEME SEÇENEKLERİ

Galvaniz Çelik/Alüminyum/Paslanmaz Çelik

## AKUSTİK

Akustik kumaş ile  $\alpha_w$ : 1,00 e kadar yüksek ses yutma değerleri

## NEM / HUMIDITY

Galvaniz panel : 90% RH  
Alüminyum panel : 100 % RH

## IŞIK YANSITMA

Perforesiz : 9010 Boyalı % 86  
Perforeli : 9010 Boyalı % 72

## HİJYEN


Anti-Mikrobiyal boya sayesinde, panel yüzeyindeki bakteri oluşumunu engellemede yüksek performans sağlanır.

## BOYA

Boya öncesinde, hassas yüzey temizliği ve fosfat kaplaması uygulanır. 6 robot kollu elektro static system sayesinde minimum 60 mikron boya panele uygulanır ve 180 mt uzunluğundaki fırında pişirilir. Tüm boyama işlemi otomatik olarak bilgisayar kontrolünde gerçekleşir.


# SİSTEM PARÇALARI ÖZELLİKLERİ

## 1. Clip-in Panel

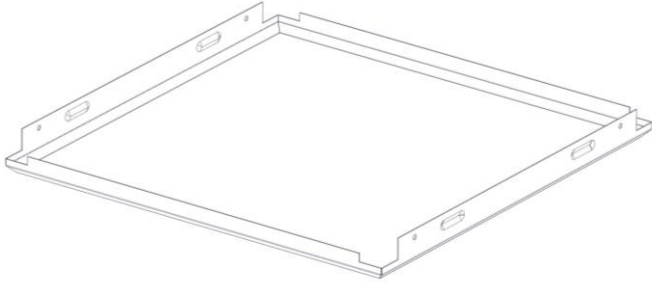


**T** : (panel ölçüsüne kadar) Galvaniz Çelik **H** : 50 mm  
**W** : Min 100 mm / Max 1200 mm **L** : Min 100 mm / Max 4000 mm

## 2. Dübel

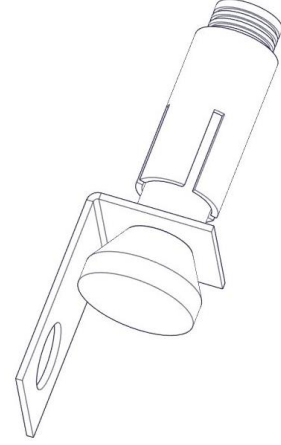


**T** : Ø 6 mm Galvaniz Çelik  
**H** : 25 mm

## 3. Omega Taşıyıcı Ekleme

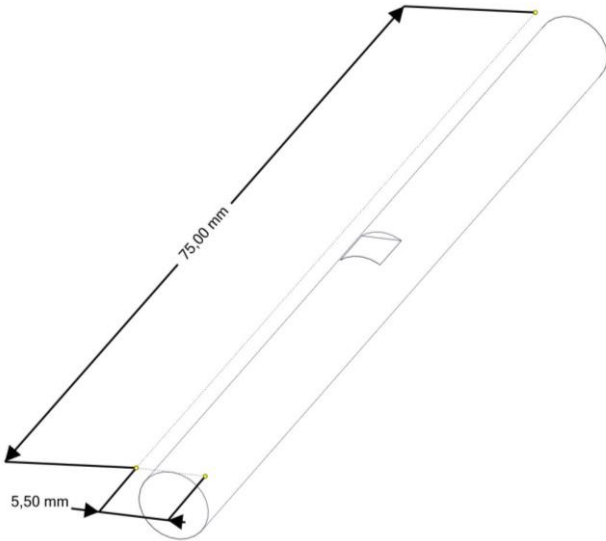


**T** : Ø 5,50 Galvaniz Çelik  
**L** : 75 mm

## 4. U Köşebent

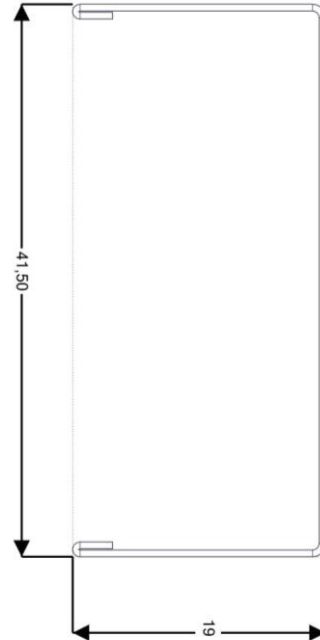


**T** 0,5 mm Boyalı Çelik  
**W** : 19 mm **H** : 41,50 mm **L** : up to 3000 mm

### 5. Omega Birleřtirme Klipsi

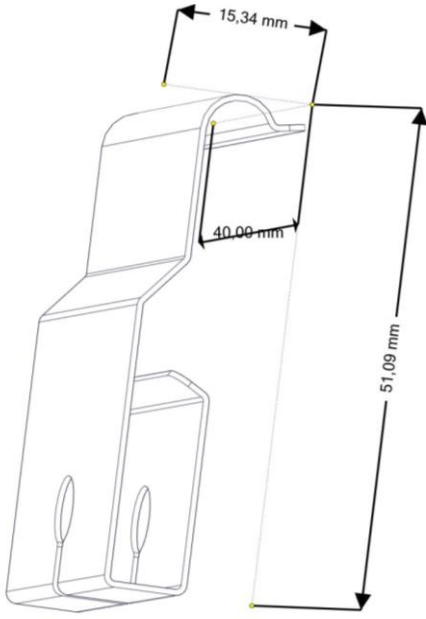


T : 0,50 mm Yay elięi

### 6. iftli Askı Yayı

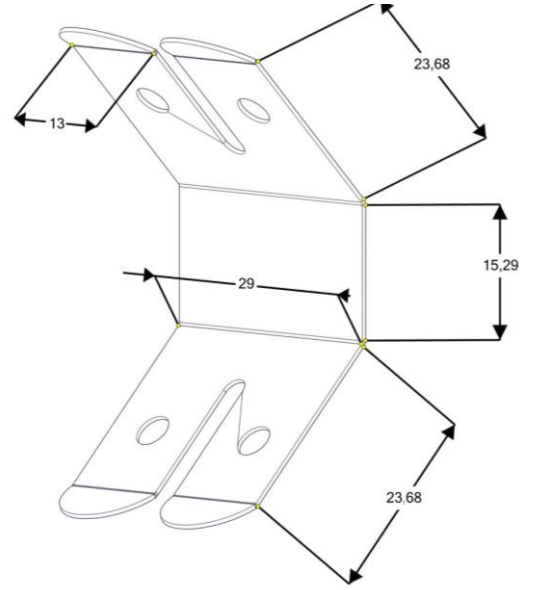


T : 0,50 mm Yay elięi

### 7. Omega Tařıyıcı

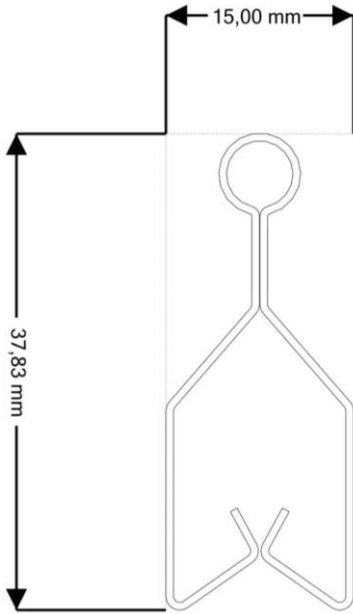



T : 0,50 mm Galvaniz elik  
W : 15 mm H : 38 mm L : up to 4000 mm

### 8. Askı Teli

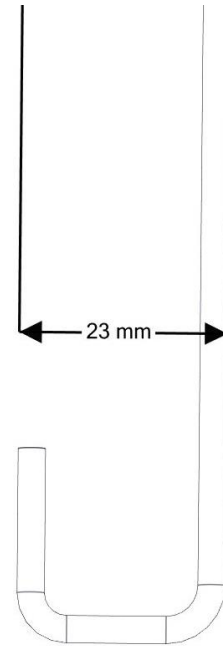


T : Ø 4 mm Galvaniz elik  
L : up to 2000 mm

# DETAYLI KESİT

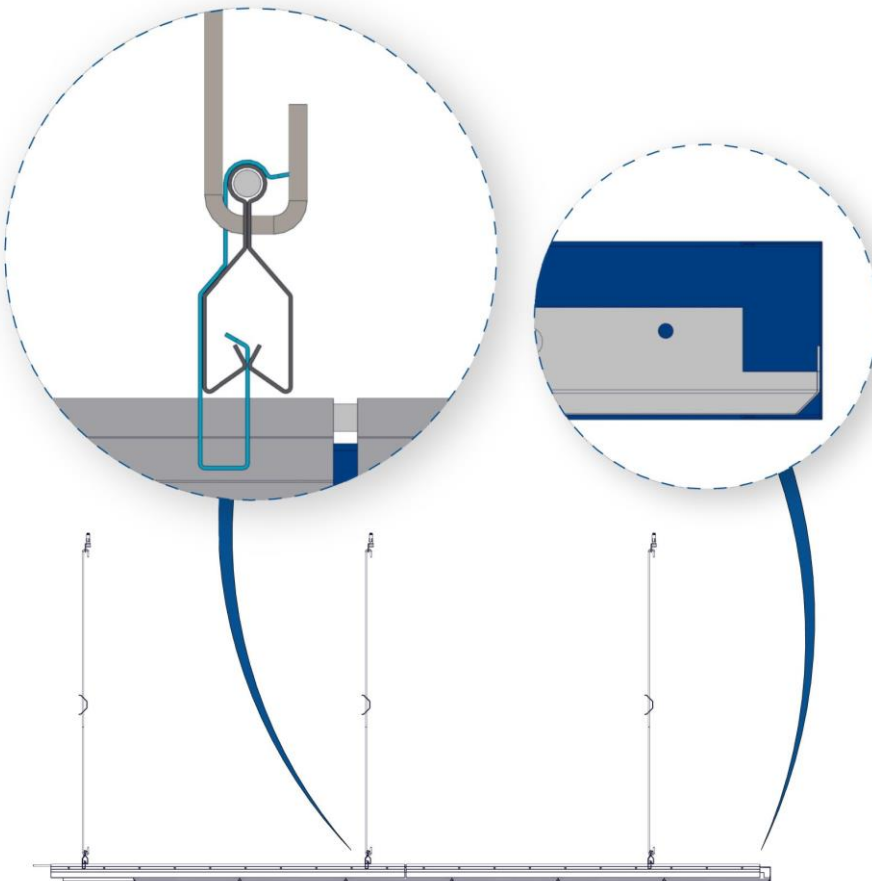
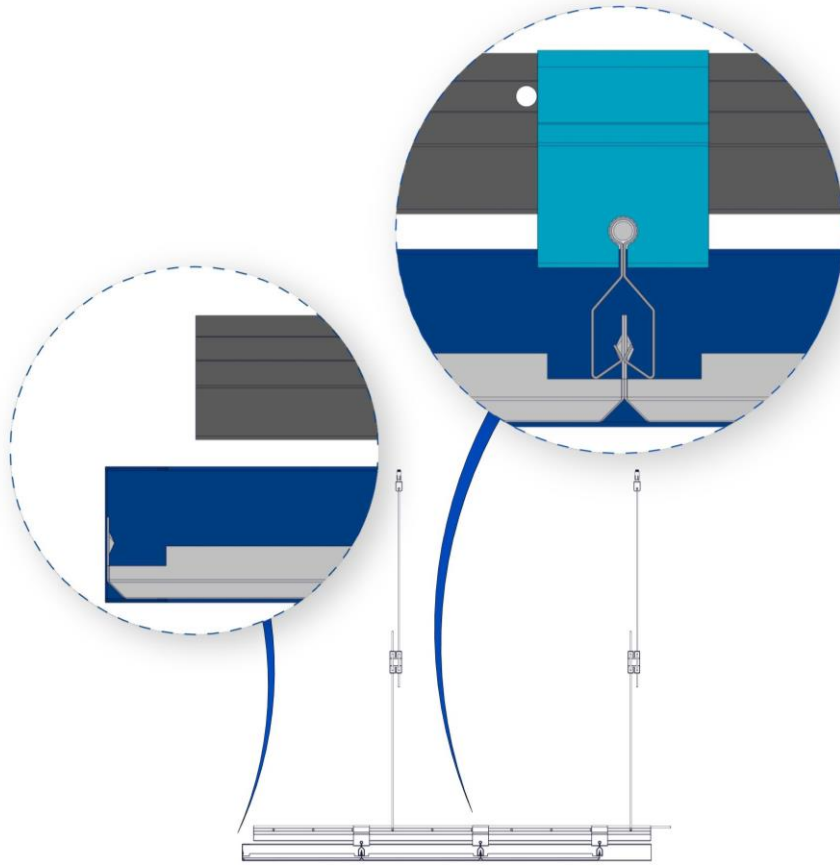


# UYGULAMA TEKNİĞİ

ADIM 1.

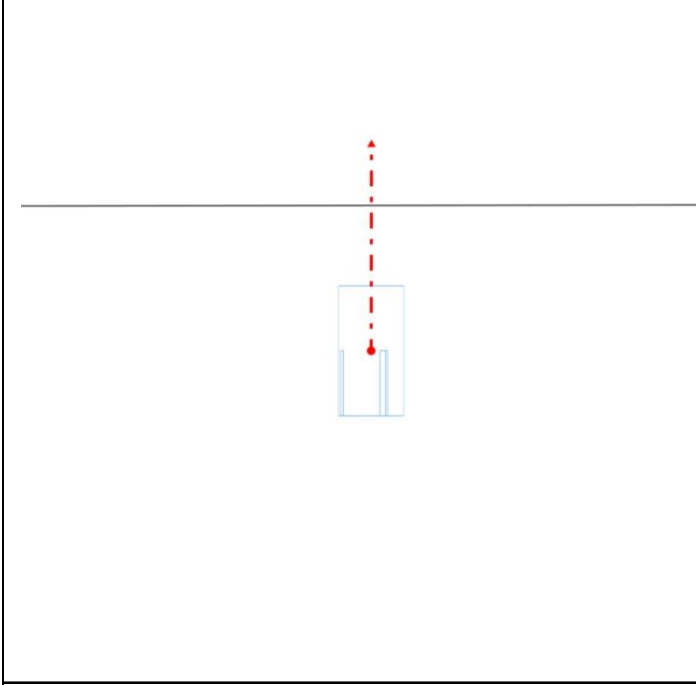


ADIM 2.

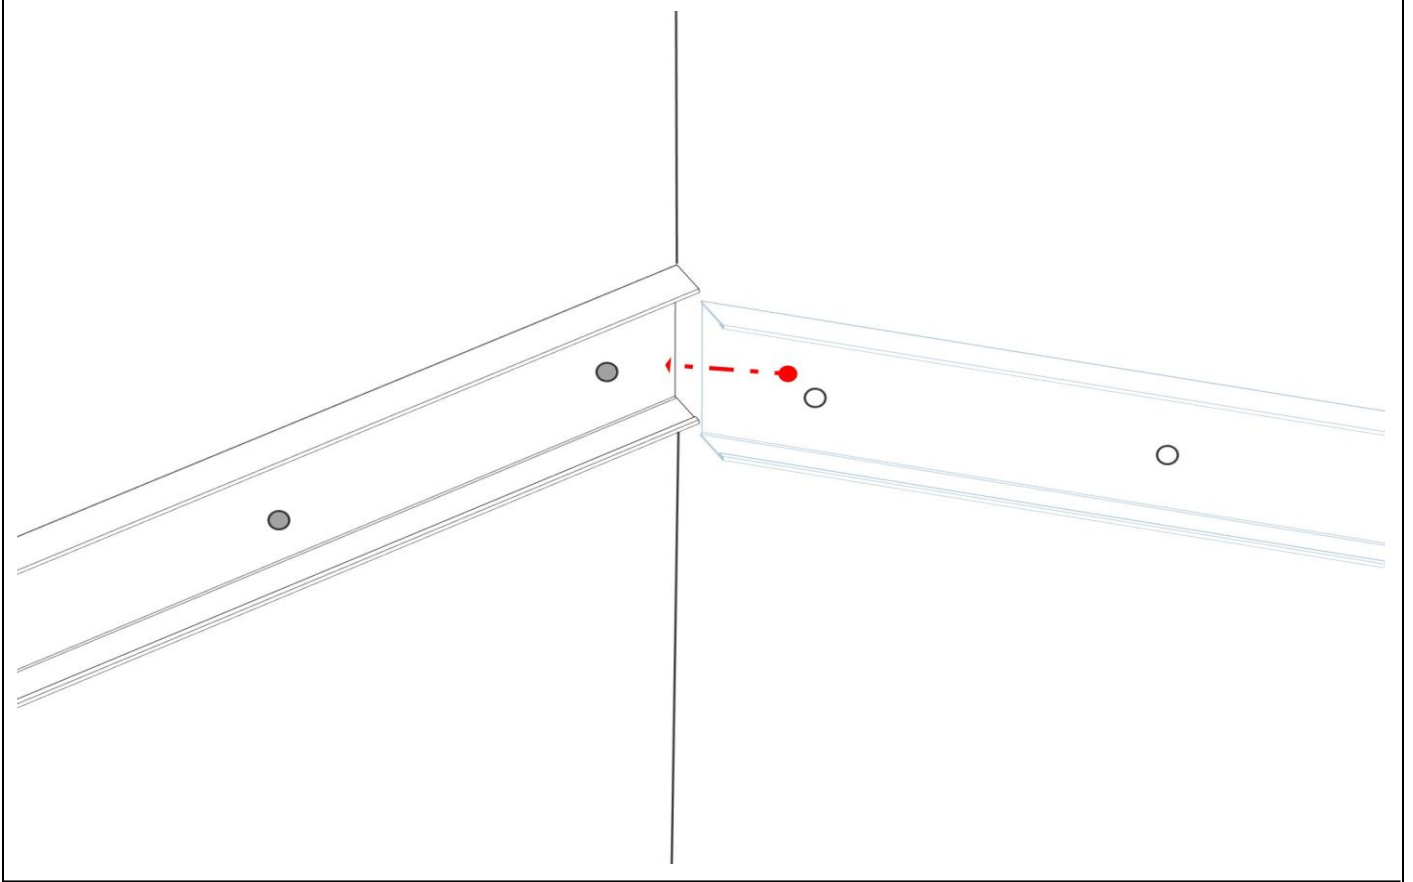
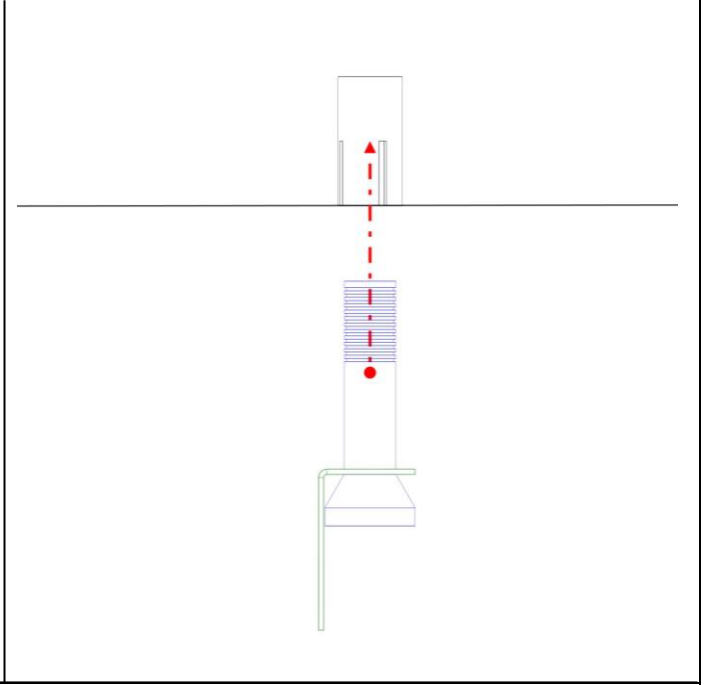


ADIM 3.

ADIM 4.

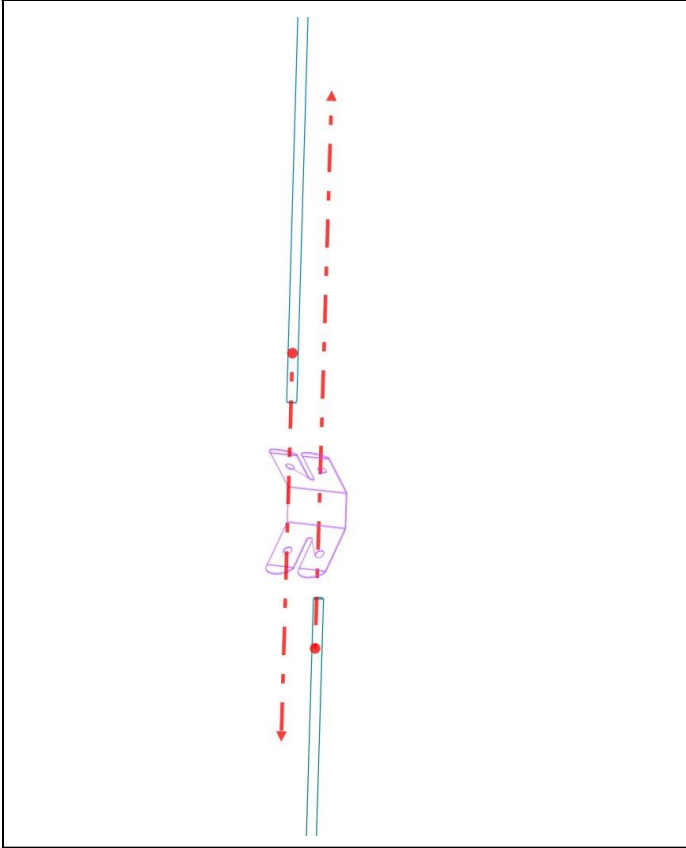



ADIM 5.

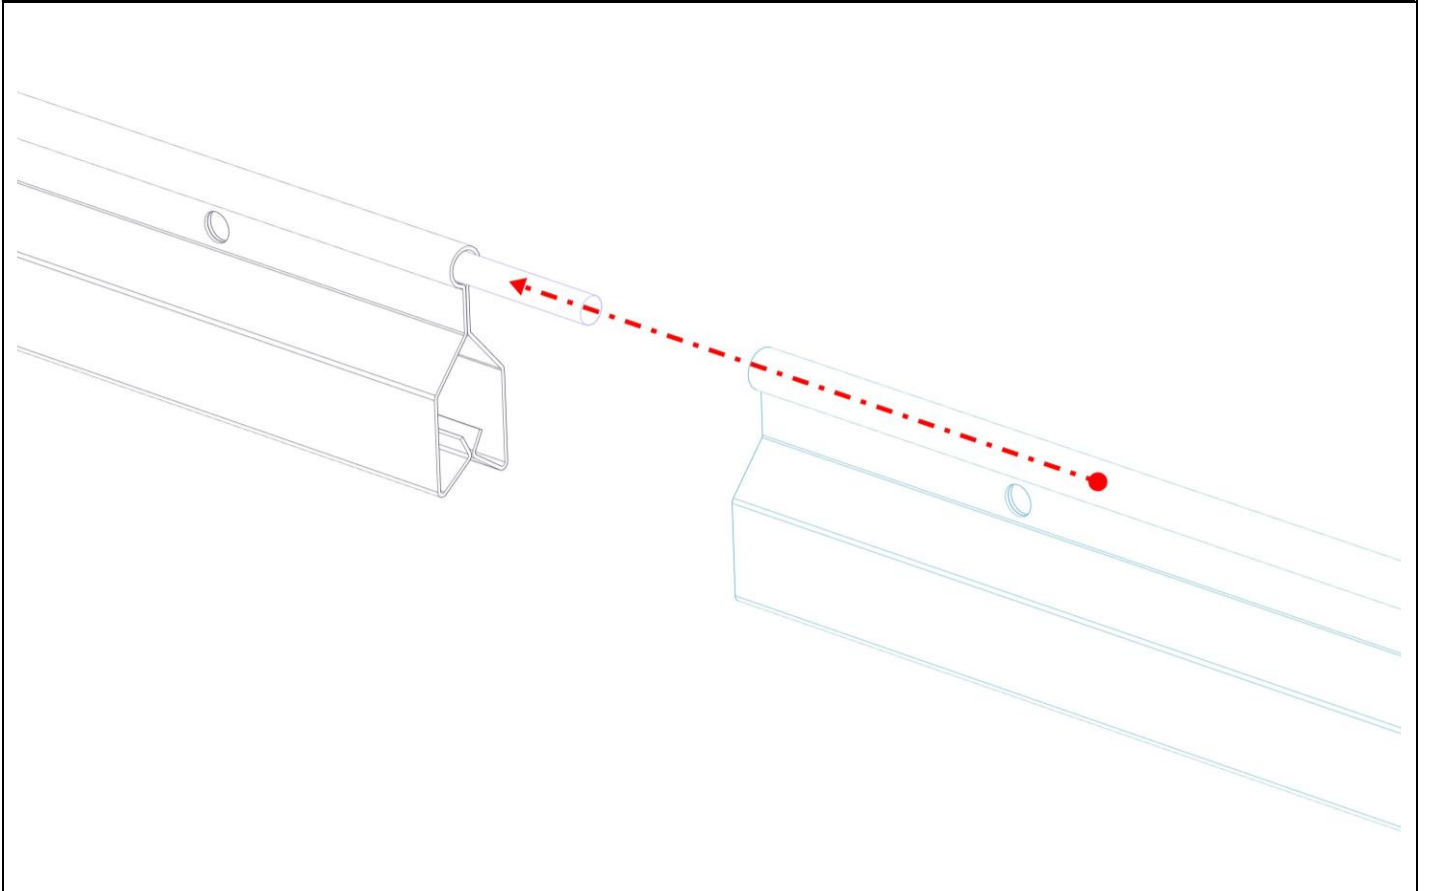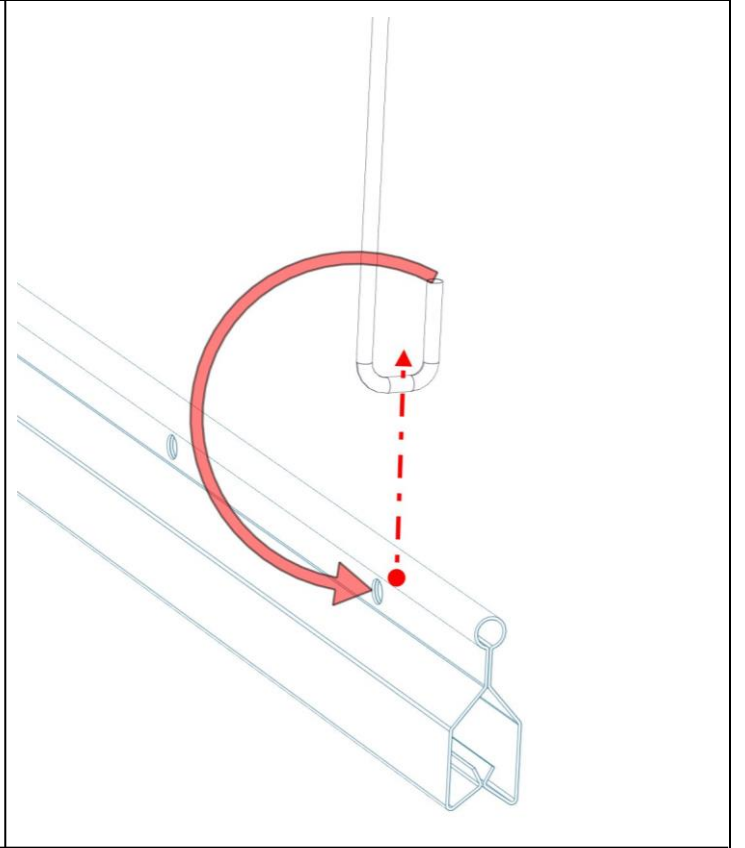

ADIM 6.




ADIM 7.

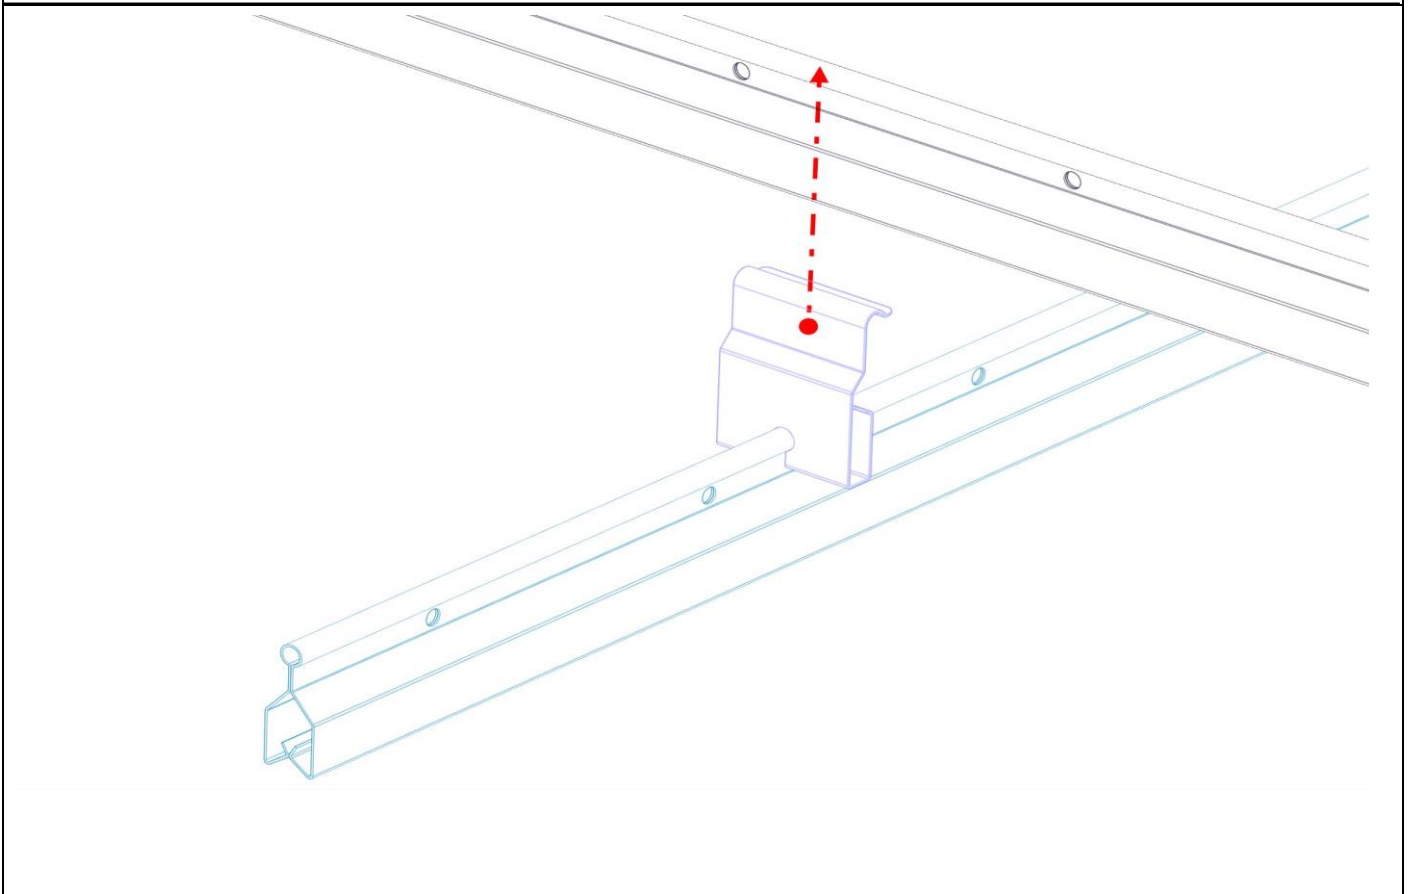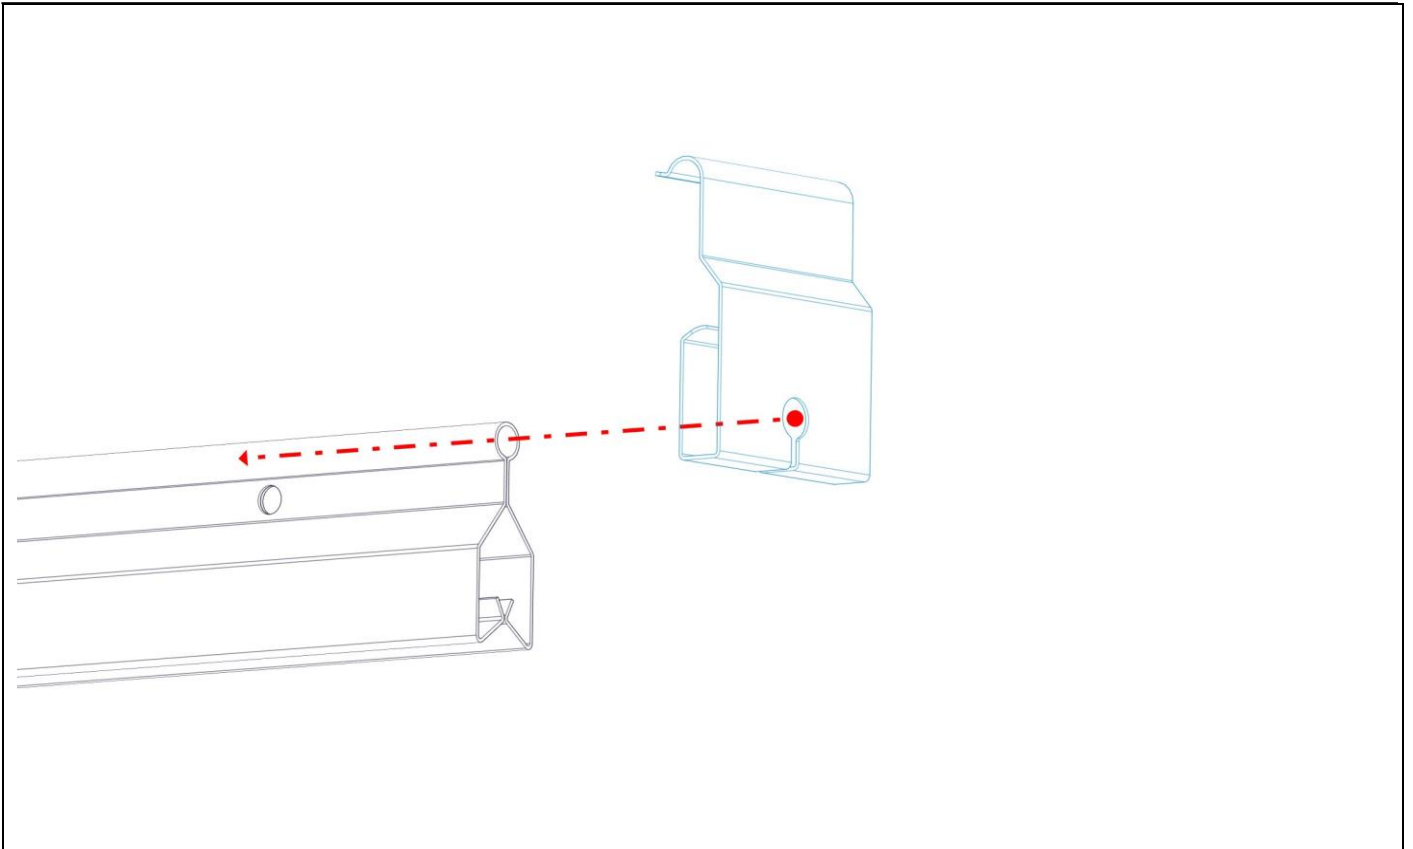

ADIM 8.

ADIM 9.

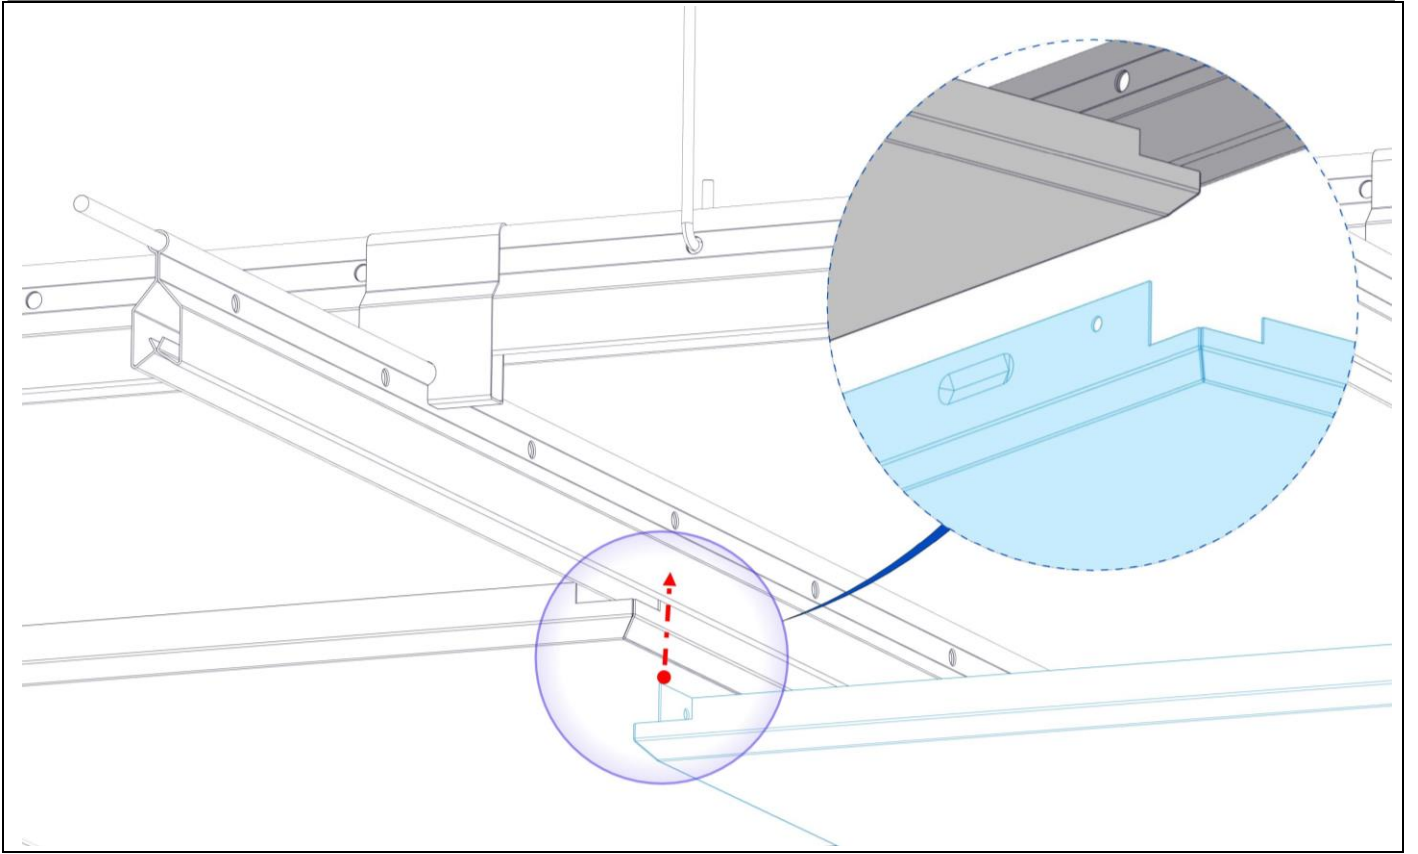

# Declaration of Performance

No:A-INT.PD20171001-01



1.Uniquade identification code of the product-type:	"BUTEM" Metal Ceiling Systems
2.Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11 (4):	Product Type, Order/Batch Nr.
3.Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:	Internally, to produce an installed suspended ceiling
4.Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11 (5):	<b>BÜTEM METAL FORM SANAYİ TİCARET A.Ş.</b> Osman Gazi Mahallesi Ziya Gökalp Caddesi No:10 Esenyurt Istanbul Turkey T:+90 (212)886 33 00 F:+90 (212) 886 33 10 www.butemmetal.com.tr
5.Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12 (2):	Not Applicable
6.System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:	Systems 3
7.In case of the declaration of performance concerning a construction product covered by a harmonized standard:	(a)The manufacturer carrying out factory production control; (b) Turkish Standards Institution (TSE) /Notified Body No:1783 issued the Reaction to Fire classification report (Report No:TSE-19.01.2017-170050) according to TS EN 13501-1+A1:2013-04 as the notified testing laboratory (based on sampling carried out by the manufacturer).
8.In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:	Not Applicable

# Declaration of Performance

No:A-INT.PD20171001-01



## 9.Declared Performance

- (a) Column 1 shall contain the list of essential characteristics as determined in the harmonized technical specifications for the intended use or uses indicated in point 3 above.
- (b) For each essential characteristic listed in column 1 and in compliance with the requirements of Article 6, Column 2 shall contain the declared performance, expressed by level or class, or in a description, related to the corresponding essential characteristics. The letters 'NPD' (No Performance Determined) shall be indicated where no performance is declared.
- (c) For each essential characteristic listed in column 1, column 3 shall contain:
- I-Dated reference of the corresponding harmonized standard and, where relevant, the reference number of the Specific or Appropriate Technical Documentation used; or
  - II-Dated reference of the corresponding European Assessment Document where available and reference number of the European Technical Assessment used.

Essential Characteristics	Performance	Harmonized Technical Specification
<b>Reaction To fire</b>	A2-s1, d0	TS EN 13964:2014-04 + TS EN13501-1+A1:2010
<b>Release of Dangerous Substances</b>	No Content	TS EN 13964:2014-04 + TS EN13501-1+A1:2010
<b>Flexural Tensile Strength</b>	NPD	TS EN 13964:2014-04 + TS EN13501-1+A1:2010
<b>Thermal Conductivity</b>	NPD	TS EN 13964:2014-04 + TS EN13501-1+A1:2010
<b>Durability</b>	Corrosion Class B	TS EN 13964:2014-04 + TS EN13501-1+A1:2010
<b>Sound Absorption Single Value <math>a_w</math></b>	See Table Below	TS EN 13964:2014-04 + TS EN13501-1+A1:2010

Sound Absorption Single Value $a_w$	Perforation Types		
	Ø1,5 mm	Ø1,8 mm	Ø2,5 mm
JM 60	-	0,35	0,35
Royalin R6/60	0,60		
JM 60 Double	0,45		
JM60 with 25 mm 50 kg/m <sup>3</sup> rockwool	1,00		

- 10.The performance of the product identified in point 1 and 2 is in conformity with he declared performance in point 9.  
This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.